


TECHNICAL DATA SHEET

MODEL 2003 BLACK - LOW-TEMPERATURE SAFETY BOOT

A low-temperature safety boot with leather upper, dielectric toe cap, anatomical insole, thermal internal insulation and a high-comfort PU outsole.

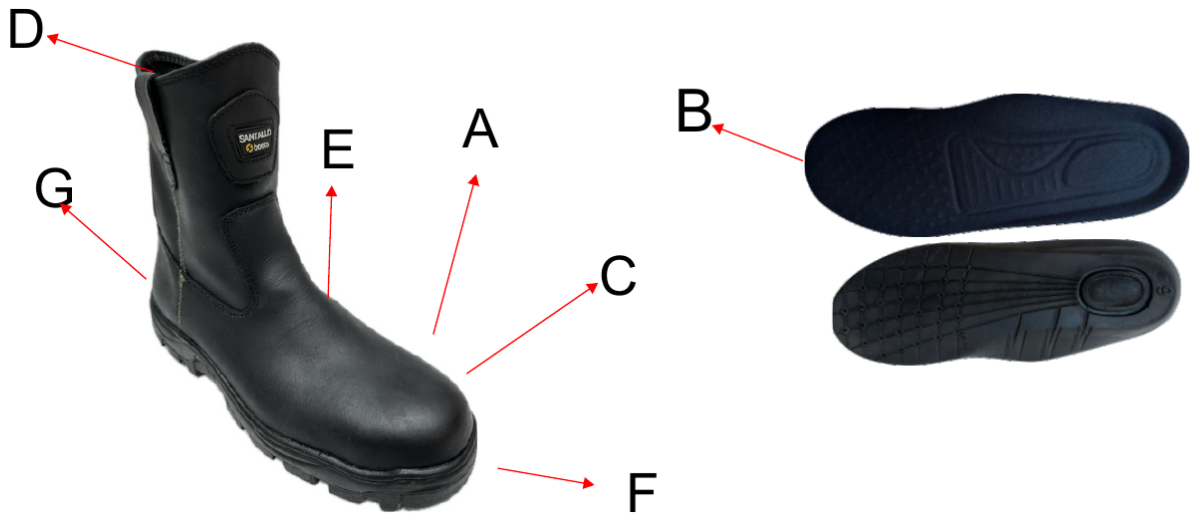

COMPONENT HIGHLIGHTS

LEATHER UPPER

2.0-2.2 mm full-grain leather with a grease finish based on waxes and anilines for a cool touch.

ANATOMICAL INSOLE

Shock-absorbing anatomical insole designed to help reduce fatigue during long workdays, with highly wear-resistant mesh.

THERMAL INSULATION

Internal aluminum thermal insulation for low-temperature protection.

PU OUTSOLE

High-comfort PU outsole with abrasion resistance, 55-60 Shore A hardness, flexing performance, and resistance to oils and solvents.

ORIGINAL PRODUCT DIAGRAM RETAINED

Component labels correspond to the detailed technical descriptions on the following page.

COMPONENT SPECIFICATIONS

Technical information translated from the original product data sheet.

A**LEATHER UPPER**

Thickness: 2.0-2.2 mm. Full-grain leather with a grease finish based on waxes and anilines, producing a cool touch.

B**INSOLE**

100% anatomical, with "SHOCK ABSORBER" properties that help reduce fatigue during long workdays, with highly wear-resistant mesh.

C**TOE CAP**

Impact-modified copolymer, fully dielectric. Lighter-weight, non-corrosive thermoplastic material; ecological and 100% thermally recyclable, with a much lower heat and cold absorption rate.

D**LINING**

100% polyester sherpa lining to allow breathability, with antibacterial and anti-perspiration treatment.

E**THERMAL INSULATION**

Internal aluminum thermal insulation for low-temperature protection.

F**OUTSOLE**

PU for high comfort and abrasion resistance. Hardness: 55-60 Shore A. Good flexing performance; withstands oils and solvents, except prolonged exposure to gasoline. Dielectric outsole, free of lead and phthalates.

G**HEEL COUNTER**

Anatomically shaped thermoplastic resin.