


TECHNICAL DATA SHEET

MODEL 2003 FLOTHER - SAFETY BOOT

A professional safety boot with a leather upper, impact-resistant non-metallic toe cap, anatomical insole and high-comfort PU outsole.

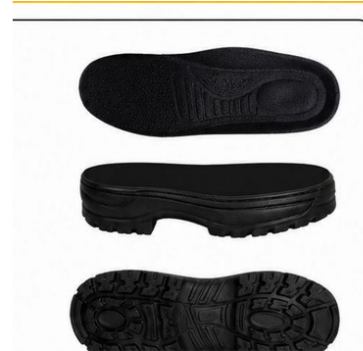

COMPONENT HIGHLIGHTS

LEATHER UPPER

2.0-2.2 mm full-grain leather with a grease finish based on waxes and anilines for a cool touch.

ANATOMICAL INSOLE

Shock-absorbing anatomical insole designed to help reduce fatigue during long workdays, with highly wear-resistant mesh.

DIELECTRIC TOE CAP

Impact-modified copolymer toe cap: fully dielectric, lightweight, non-corrosive, thermoplastic and 100% recyclable.

PU OUTSOLE

High-comfort PU outsole with abrasion resistance, 55-60 Shore A hardness, flexing performance, and resistance to oils and solvents.

ORIGINAL PRODUCT IMAGERY RETAINED

The complete component specifications are provided on the following page.

COMPONENT SPECIFICATIONS

Technical information translated from the original product data sheet.

A**LEATHER UPPER**

Thickness: 2.0-2.2 mm. Full-grain leather with a grease finish based on waxes and anilines, producing a cool touch.

B**INSOLE**

100% anatomical, with "SHOCK ABSORBER" properties that help reduce fatigue during long workdays, with highly wear-resistant mesh.

C**TOE CAP**

Impact-modified copolymer, fully dielectric. Lighter-weight, non-corrosive thermoplastic material; ecological and 100% thermally recyclable, with a much lower heat and cold absorption rate.

D**LINING**

100% polyester to allow breathability, with antibacterial and anti-perspiration treatment.

E**OUTSOLE**

High-comfort PU outsole with abrasion resistance. Hardness: 55-60 Shore A. Good flexing performance; withstands oils and solvents, except prolonged exposure to gasoline. Dielectric outsole, free of lead and phthalates.

F**HEEL COUNTER**

Anatomically shaped thermoplastic resin.